


# DIN25201 Dual-stacked self-locking washer

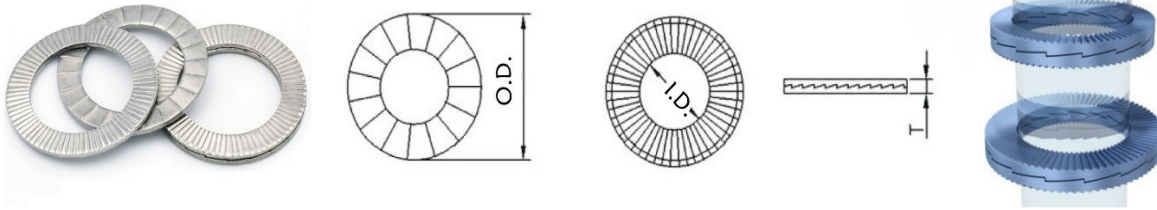

**Material:** SK5,SK7,or customized as per clients' requirements.  
**Surface treatment:** Dacrol, geomet,zinc flake,delta and so on.

Part No.	Metric	O.D. mm	I.D. mm	T mm	Weight/1000pairs kgs
SIMM3	M3	7.00	3.40	1.80	0.30
SIMM3.5	N3.5	7.60	3.90	1.80	0.40
SIMM3.5sp	M3.5	9.00	3.90	1.80	0.60
SIMM4	M4	7.60	4.40	1.80	0.40
SIMM4sp	M4	9.00	4.40	1.80	0.60
SIMM5	M5	9.00	5.40	1.80	0.50
SIMM5sp	M5	10.80	5.40	1.80	0.11
SIMM6	M6	10.80	6.50	1.80	0.70
SIMM6sp	M6	13.50	6.50	2.50	2.00
SIMM1/4"		11.50	7.20	2.50	0.80
SIMM1/4"sp		13.50	7.20	2.50	1.80
SIMM5/16"	M8	13.50	8.70	2.50	1.50
SIMM5/16"sp	M8	16.60	8.70	2.50	2.80
SIMM3/8"		16.60	10.30	2.50	2.30
SIMM3/8"sp		21.00	10.30	2.50	4.80
SIMM10	M10	16.60	10.70	2.50	2.20
SIMM10sp	M10	21.00	10.70	2.50	4.70
SIMM11	M11	18.50	11.40	2.50	2.90
SIMM12	M12	19.50	13.00	2.50	2.90
SIMM12sp	M12	25.40	13.00	3.40	9.30
SIMM1/2"		19.50	13.50	2.50	2.70
SIMM1/2"sp		25.40	13.50	3.40	9.00
SIMM9/16"	M14	23.00	15.20	3.40	5.60
SIMM9/16"sp	M14	30.70	15.20	3.40	14.10
SIMM16	M16	25.40	17.00	3.40	6.70
SIMM16sp	M16	30.70	17.00	3.40	12.80
SIMM18	M18	29.00	19.50	3.40	8.90
SIMM18sp	M18	34.50	19.50	3.40	15.80
SIMM3/4"		30.70	20.00	3.40	10.50
SIMM3/4"sp		39.00	20.00	3.40	22.10
SIMM20	M20	30.70	21.40	3.40	9.30